

March

Compact zoom 1x-4.5x24mm



D4.5V24TM (Tactical Turrets)

Exit pupil 16mm at 1x

1x-4.5x24mm scope designed for Service Rifle competition and tactical applications.

This scope should set the standard for AR-friendly 4.5x optics. This compact variable-power scope offers ideal eye relief for AR-type rifles, along with plenty of windage and elevation travel.

Side focus dial lets you see the target clearly from 10 yards to Infinity at all power settings.

Adjustment

1 Click Adjustment: 1/4 MOA

(0.26in at 100yds)

25 MOA turret revolution

(10.47in at 100yds).

Elevation Travel: 200 MOA


Windage Travel: 200 MOA

Reticle

MTR-D2 reticle

Center Dot Reticle


1/2 MOA Dot at 4.5x

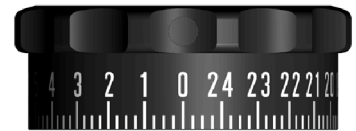

Tactical model
Elevation dial





Tactical model
Windage dial

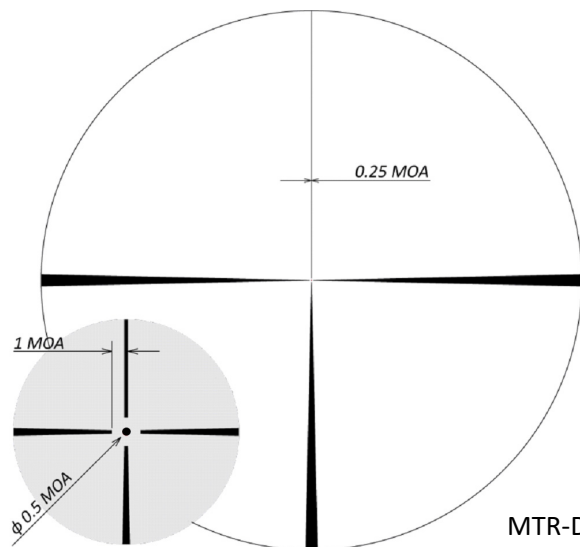


MTR-D2
At 4.5x


Reticle
MTR-5 reticle
Center Dot Reticle
1.1 MOA Dot at 4.5x

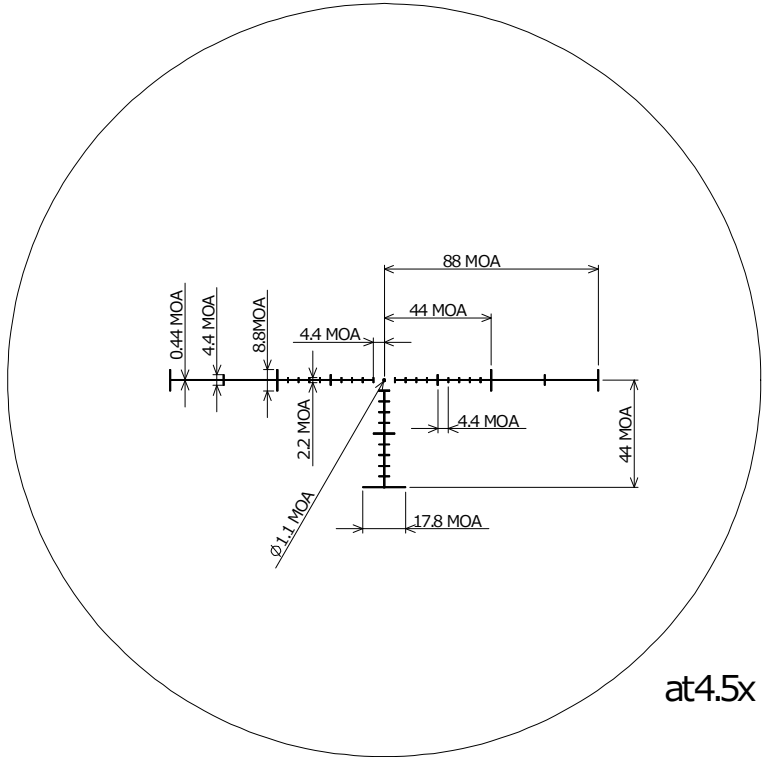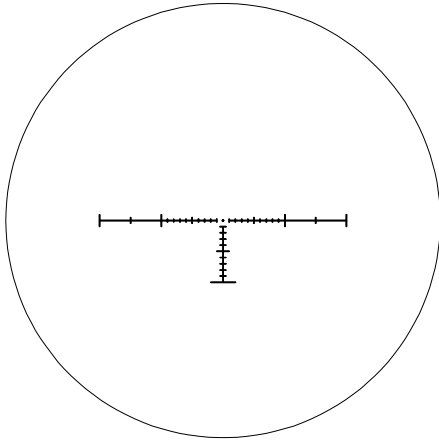

Reticle
MTR-D3 reticle

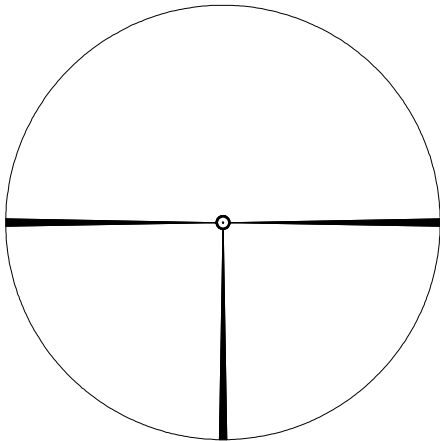


Enlarged view of center

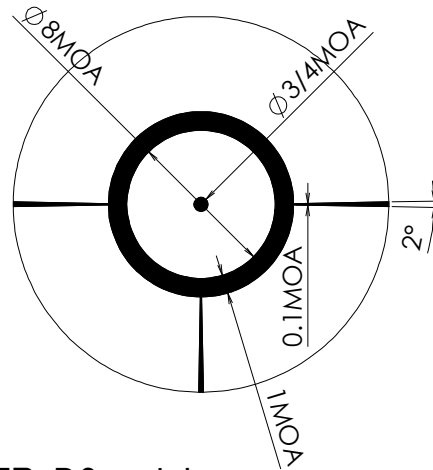

MTR-D3 reticle
At 4.5x



Compact zoom 1x-4.5x24mm Riflescope			
SPECIFICATIONS			
Model No.		D4.5V24TM	
Magnification	Low	1x	
	High	4.5x	
Effective Lens Diameter		24mm	
Exit Pupil	Low	16mm	
	High	5.33mm	
Field of View real	Degree	Low	19°
		High	4.22°
	ft/Yd	Low	100.4ft/100Yd (33.47m/100m)
		High	22.12ft/100Yd (7.37m/100m)
Eye Relief	Low	73-103mm	
	High	73-103mm	
1 Click Value		1/4MOA	
1 Turn travel		25MOA	
Elevation Travel		200MOA	
Windage Travel		200MOA	
Focus		Side Focus	
Distance		10yd-infinity	
Finish		Matte Black	
Illumination		No	
Reticle		MTR-D2 MTR-D3 MTR-5	
Body Tube Diameter		30mm	
Weight	g	530	
	oz	18.7	

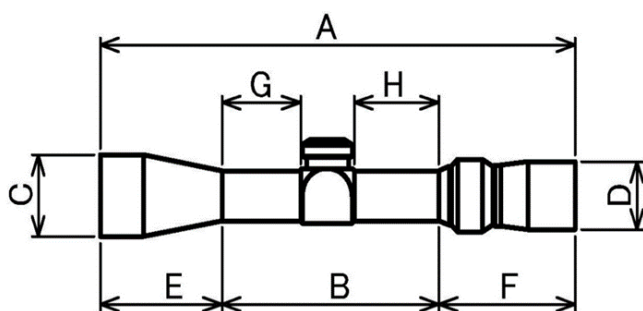

	1x-4.5x24
A	260mm(10.2inch)
B	131mm(5.2inch)
C	33mm(1.3inch)
D	41mm(1.6inch)
E	35mm(1.4inch)
F	94mm(3.7inch)
G	49mm(1.9inch)
H	46mm(1.8inch)